

**NEW**  
*Secure by Design option*



# ThermoPro Entrance Doors

Steel entrance doors and side doors



# Enjoy your home

Entrance doors in proven Hörmann quality



Hörmann's steel ThermoPro doors are available in a large selection of styles. Thanks to standard multiple-point locking, these competitively priced doors give you a feeling of security, save energy through excellent thermal insulation and provide a stylish appearance for your home.

## Without visible leaf frame

Hörmann's ThermoPro entrance doors have an exclusive appearance. A beautifully shaped smooth door leaf made of steel, without a visible leaf frame, simply looks good.

## High thermal insulation

Nowadays, people try to save energy everywhere in their homes and ThermoPro doors also play their part. Thanks to a 46-mm-thick door leaf completely filled with PU rigid foam, these doors provide excellent thermal insulation with a U-value of up to 1.2 W/m<sup>2</sup>K, reducing your energy bills.

## The best sealing possible

Double seals on all four sides with additional corner seals near the bottom provide extra protection against bad weather. Heat loss is also reduced.

## 12-point security

Because you and your family want to feel safe at home, all ThermoPro doors are equipped with multiple-point locking as standard for extra security.

## Break-in-resistant Secure by Design option

Many entrance door styles\* also come with Secure by Design equipment for more security for you and your family.



## Certified brand quality

All ThermoPro doors are manufactured in line with ISO 9001 and regularly subjected to the strictest quality tests. A CE mark indicates that the doors comply with EU directives in accordance with EN 14351-1. All of the door requirements laid out therein are adhered to. The advantages for you:

- Water-tight under heavy rain
- Stable under heavy winds
- Airtight
- Acoustic insulation
- Thermal insulation



\* Without side elements



High thermal insulation thanks to a door leaf with thermal break, filled with PU rigid foam.



Double seals with additional brush seal at the bottom protects against bad weather.



Standard 5-point locking gives you a feeling of security.



With over 75 years of experience and approx. 15 million doors sold, Hörmann has become the market leader and Europe's number one for garage doors. Hörmann's automatic sectional doors feature modern convenience, high security, and a sophisticated appearance. Your Hörmann partner will be pleased to advise you further.

## High thermal insulation

The entrance door styles on this page are characterised by flush-fitting triple-pane glazing on the interior and exterior for especially good thermal insulation.





\*\*TPS 700 in Traffic white RAL 9016.

\*\*TPS 800 in Traffic white RAL 9016.



\*\*TPS 900 in Traffic white RAL 9016, with side elements (optional).

◀ TPS 700 in Traffic white RAL 9016, with side elements (optional).

### TPS 700

Stainless steel handle HB 38-2 on steel infill, full glazing: Triple-pane insulated glass, clear laminated safety glass outside, clear float, sand-blasted with clear horizontal stripes inside. U-value up to 1.5 W/m<sup>2</sup>K\*.

### TPS 800

Stainless steel handle HB 38-2 on steel infill, with 4 glazing squares: Triple-pane insulated glass, laminated safety glass outside, clear float sand-blasted with clear squares inside. U-value up to 1.4 W/m<sup>2</sup>K\*.

### TPS 900

Stainless steel handle HB 38-2 on steel infill, with rounded glazing: Triple-pane insulated glass, sand-blasted with clear horizontal stripes and clear laminated safety glass inside. U-value up to 1.5 W/m<sup>2</sup>K\*.

### TPS 700/800/900

#### side elements/transom lights

- Double-pane insulated glass, laminated safety glass on the outside and sand-blasted float without clear stripes on the inside.
- Double-pane insulated glass, laminated safety glass outside, clear float inside

#### Glazing frame

- Stainless steel



#### Colours/ surface finishes

- In 11 preferred colours
- With Decograin surface finish



#### \*\*Secure by Design option

The door styles TPS 700 / 800 / 900 without side elements or transom lights are also available in a break-in-resistant Secure by Design option.



\* Dependent on door size

## **Long-lasting brand quality**

**Hörmann steel ThermoPro doors are hot galvanized, corrosion-resistant and come with a high-quality polyester paint.**





\*\*TPS 010 in Traffic white RAL 9016.



TPS 020 in Traffic white RAL 9016.



\*\*TPS 030 in Traffic white RAL 9016.



\*\*TPS 040 in Traffic white RAL 9016.

◀ TPS 020 in Traffic white RAL 9016.

### TPS 010

Stainless steel handle HB 14-2 on steel infill, U-value up to 1.2 W/m<sup>2</sup>K\*.

#### TPS 010 side elements/transom lights

- Double-pane insulated glass, clear laminated safety glass outside, Mastercarré inside
- Double-pane insulated glass, laminated safety glass outside, ornamental glass 504 inside
- Double-pane insulated glass, laminated safety glass on the outside and sand-blasted float on the inside.
- Double-pane insulated glass, laminated safety glass outside, clear float inside

### TPS 020/TPS 030

Stainless steel handle HB 14-2 on steel infill, full glazing: Double-pane insulated glass, laminated safety glass outside, Mastercarré inside. U-value up to 1.4 W/m<sup>2</sup>K\*.

#### TPS 020/030 side elements/transom lights

- Double-pane insulated glass, clear laminated safety glass outside, Mastercarré inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

### TPS 040

Stainless steel handle HB 14-2 on steel infill, with round glazing Ø 300 mm: Double-pane insulated glass, laminated safety glass on the outside, ornamental glass 504 on the inside. U-value up to 1.3 W/m<sup>2</sup>K\*.

#### TPS 040 side elements/transom lights

- Double-pane insulated glass, laminated safety glass outside, ornamental glass 504 inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

#### Glazing frame

- Composite round-style frame



#### Colours/ surface finishes

- In 11 preferred colours
- With Decograin surface finish



#### \*\*Secure by Design option

Door styles TPS 010, 030 and 040 without side elements or transom lights are also available in the break-in-resistant Secure by Design option.



\* Dependent on door size

## Ribbed styles // NEW

All-over elegance thanks to timeless ribbing matching  
Hörmann's M-ribbed sectional garage doors.







**\*\*TPS 015** in Traffic white RAL 9016.



**TPS 025** in Traffic white RAL 9016.

◀ **TPS 015** in Traffic white RAL 9016, with side element (optional).

**TPS 015**

Stainless steel handle HB 14-2 on steel infill, ribbed, U-value up to 1.3 W/m²K\*.

**TPS 015 side elements/transom lights**

- Double-pane insulated glass, clear laminated safety glass outside, Mastercarré inside
- Double-pane insulated glass, laminated safety glass outside, ornamental glass 504 inside
- Double-pane insulated glass, laminated safety glass on the outside and sand-blasted float on the inside.
- Double-pane insulated glass, laminated safety glass outside, clear float inside

**TPS 025**

Stainless steel handle HB 14-2 on steel infill, ribbed, full glazing: Double-pane insulated glass, laminated safety glass outside, Mastercarré inside. U-value up to 1.5 W/m²K\*.

**TPS 025 side elements/transom lights**

- Double-pane insulated glass, clear laminated safety glass outside, Mastercarré inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

**Glazing frame**

- Composite round-style frame



**Colours/ surface finishes**

- In 11 preferred colours
- With Decograin surface finish



**\*\* Secure by Design option**

Door style TPS 015 without side elements or transom lights is also available in the break-in-resistant Secure by Design option.



\* Dependent on door size

## Classic style

These panel styles blend in perfectly with a panelled Hörmann garage door and underline your good taste.





\*\*TPS 100 in Traffic white RAL 9016.



\*\*TPS 200 in Traffic white RAL 9016.



TPS 300 in Traffic white RAL 9016.



TPS 400 in Traffic white RAL 9016.

◀ TPS 300 in Traffic white RAL 9016, with side element (optional).

### TPS 100

Gold exterior handle on steel infill, with 6 panels. U-value up to 1.3 W/m<sup>2</sup>K\*.

### TPS 200

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish with surface-mounted rails inside. U-value up to 1.4 W/m<sup>2</sup>K\*.

### TPS 300

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish with surface-mounted rails inside. U-value up to 1.8 W/m<sup>2</sup>K\*.

### TPS 400

Stainless steel handle HB 14-2 on steel infill, double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish with surface-mounted rails inside. U-value up to 1.7 W/m<sup>2</sup>K\*.

#### Side elements TPS 100/200

- Panel infill, 46 mm, with 3 panels
- Double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

#### Side elements TPS 300/400

- Panel infill, 46 mm, with 1 panel and double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish with surface-mounted rails inside.
- Double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

#### Transom light

- Double-pane insulated glass, laminated safety glass outside, cathedral glass with small hammered finish inside
- Double-pane insulated glass, laminated safety glass outside, clear float inside

#### Glazing frame

- Composite profile-style frame



#### Colours/ surface finishes

- In 11 preferred colours



#### \*\* Secure by Design option

Door styles TPS 100 and 200 without side elements or transom lights are also available in the break-in-resistant Secure by Design option.



\* Dependent on door size

**A question of taste:**  
Select your favourite colour.



You can select according to your taste – whether you want classic white, one of several preferred colours or a Decograin surface – all matching your Hörmann garage door.



**TPS 020** in the preferred colour Ruby red RAL 3003.



**TPS 200** in the preferred colour Terra brown RAL 8028.



**TPS 800** in the Decograin surface Golden Oak.



**TPS 900** in the Decograin surface Titan Metallic.



**TPS 300** in the preferred colour Fir green RAL 6009.



**TPS 700** in the Decograin surface Dark Oak.

**In competitively-priced Traffic white as standard**

ThermoPro doors are supplied in Traffic white as standard.

**11 preferred colours**

Entrance doors also come in 11 inexpensive preferred colours for the exterior and interior.



White aluminium RAL 9006



Fir green RAL 6009



Terra brown RAL 8028



Moss green RAL 6005



Clay brown RAL 8003



Ochre brown RAL 8001



Light grey RAL 7035



Ruby red RAL 3003



Window grey RAL 7040



Cream RAL 9001



Anthracite grey RAL 7016


**Exclusively for the styles**

**TPS 010 / 015 / 020 / 025 / 030 / 040 / 700 / 800 / 900**

These styles are available with the exteriors and interiors of doors in the Decograin surface Golden Oak or Dark Oak for a natural timber look and in Titan Metallic for a modern door appearance.



Golden Oak



Dark Oak



Titan Metallic

The colours and surface finishes shown are subject to the limitations of the printing process and cannot be regarded as binding.

## It's your choice:


Individual handles and glazings for doors,  
side elements and transom lights



▲ **TPS 700** in Decograin Titan Metallic, with side elements and transom light (optional).

All of the doors in Hörmann's ThermoPro entrance door range  
come with side elements and transom lights for a brighter entrance.

## Glazings for doors



### TPS 700/800/900

Triple-pane insulated glass (44 mm) provides an excellent thermal insulation value of up to 1.4 W/m<sup>2</sup>K (U-value). A flush-fitting appearance on the interior and exterior, as well as a stainless steel glazing frame, underscore the door's elegant look.



### TPS 020/025/030 / 040

The double-pane insulated glass (24 mm) is characterised by high thermal insulation with a U-value of up to 1.3 W/m<sup>2</sup>K. A modern, harmonious door appearance is created with a round-style composite glazing frame.



### TPS 200/300/400

The double-pane insulated glass (24 mm) offers high thermal insulation and a U-value of up to 1.4 W/m<sup>2</sup>K. The profile-style composite glazing frame perfectly blends in with the classic panel look.


## Glazings for side elements and transom lights



Float, sand-blasted



Float, clear



Mastercarré



Ornament 504



Cathedral small hammered

## A beautiful handle and letter slot accents the door: Select your desired handle

As standard, all doors come with the exterior handle shown. Alternatively, you can select a different handle or material:



Lever handle set (shown in silver)



Lever handle set (shown in gold)



Lever/knob handle set (shown in silver)



Lever/knob handle set (shown in gold)



Security Lever handle set (shown in silver)




Security Lever handle set (shown in gold)



Security Lever/knob handle set (shown in silver)



Security Lever/knob handle set (shown in gold)



Letter plate (shown in silver)



Letter plate (shown in gold)



**Spy Viewer**  
For doors without windows (Optional extra)

# Fully equipped as standard

Brand quality will win you over in every respect

## 12-point locking with a pivoting bolt lock

Feeling safe at home: 2 conical swing bolts engage with 2 additional security bolts and 1 lock bolt in the frame's lock plates and pull the door tightly shut. Three further security bolts on the hinge side in conjunction with the 3 standard hinges make it practically impossible to force the door open. With a soft-lock latch to quietly close the door.



Soft-lock latch




Locking rod



Swing bolt with security bolts



Security bolts

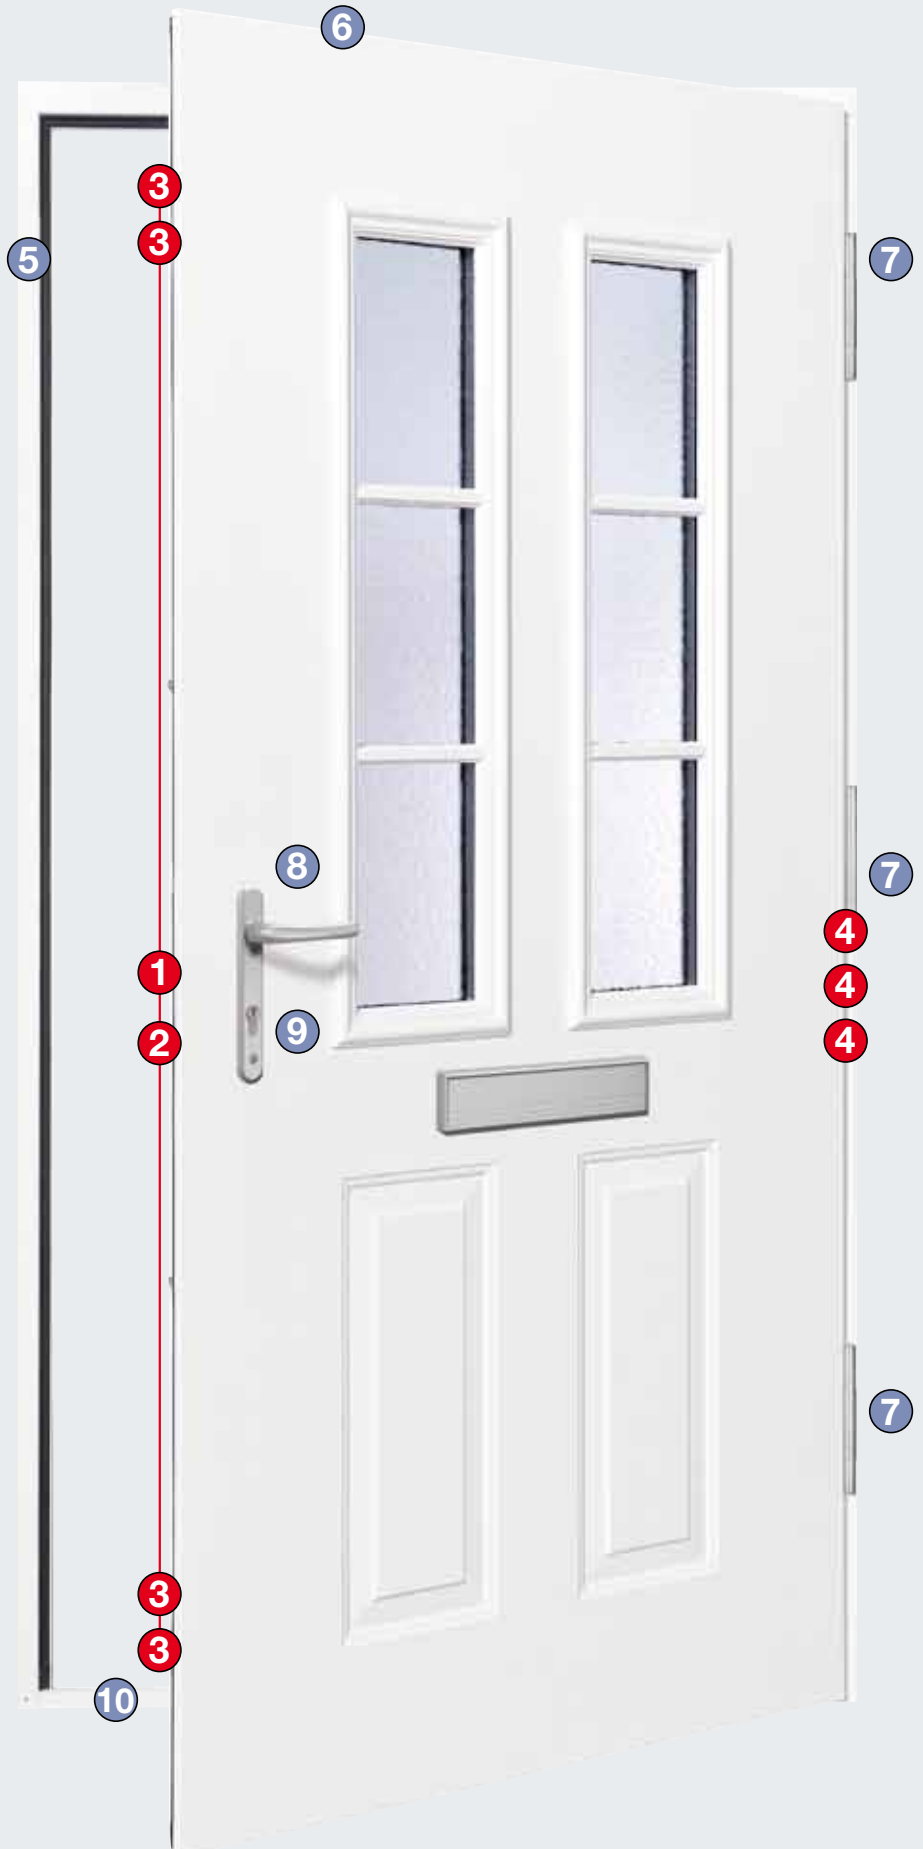



5



#### Aluminium frame

An aluminium frame with thermal break provides exceptionally high thermal insulation and the round-style design gives your door an extremely exclusive appearance.

6



#### Flush-fitting door appearance

A smooth, all-over door leaf without visible leaf frame creates a harmonious appearance.

7



#### Perfectly hung with 3-way adjustable hinges

Sturdy, two-part 3-way adjustable hinges with safety pins and aluminium decorative covers guarantee smooth door function.


8



#### Interior lever

Each door comes with a beautifully-shaped handle set matching the classic or contemporary design of the door.

9

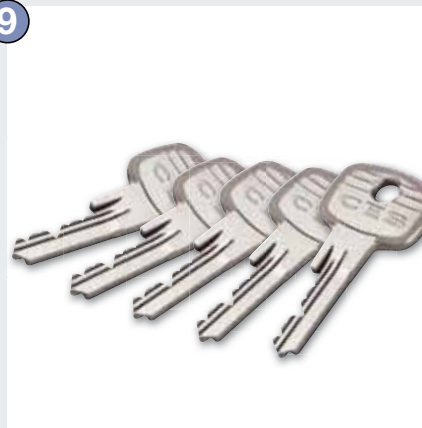

#### Profile cylinder

Delivered with 5 keys as standard. With emergency and hazard function, i.e. the door lock can still be operated when the key is inserted on the inside.

10



#### The best sealing possible

Save valuable energy: a 20-mm-high plastic threshold with thermal break and double, all-round seals reduce heat loss. The additional brush seals at the bottom provide optimum protection against bad weather.

### Optional extras for added convenience and security:

#### Electric strike

With the electric strike catch, you can conveniently open your door via a switch inside the house. Alternatively, e.g. during the day, you can also toggle the locking lever so that the entrance door can be opened by a slight push from the outside.

#### Door drip

Attractive protection: The door drip in Traffic white RAL 9016 diverts driving rain and is easy to retrofit.

# ThermoPro

## Dimensions and fitting data

### Aluminium frame

#### Doors

Standard European Sizes	
Overall frame dimension (ordering size)	Clear passage *
1,000 × 2,100	872 × 2,016
1,100 × 2,100	972 × 2,016

Special sizes	
	Overall frame dimension (ordering size)
TPS 100, 200, 300, 400	875 – 1,100 × 1,990 – 2,100
TPS 020, 025, 030, 700, 800, 900	875 – 1,250 × 1,990 – 2,250
TPS 010, 015, 040	875 – 1,250 × 1,875 – 2,250

All measurements in millimetres.

#### Side elements


Standard European Sizes	
	Overall frame dimension (ordering size)
Glass infill: Mastercarré, clear glass, sand-blasted float TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	400 × 2,100
Panel infill: TPS 100, 200, 300, 400	450 × 2,100

Special sizes	
	Overall frame dimension (ordering size)
Glass infill: TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	400 – 500 × 1,875 – 2,250 mm


#### Transom lights

Special sizes	
	Overall frame dimension (ordering size)
Glass infill: TPS 010, 015, 020, 025, 030, 040, 700, 800, 900	875 – 2,250 × 400 – 500
Panel infill: TPS 100, 200, 300, 400	875 – 2,000 × 400 – 500


#### Horizontal view of door

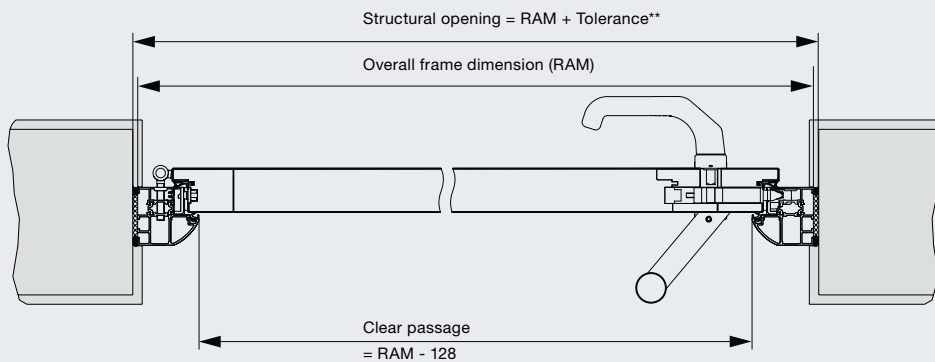

#### Vertical view of door

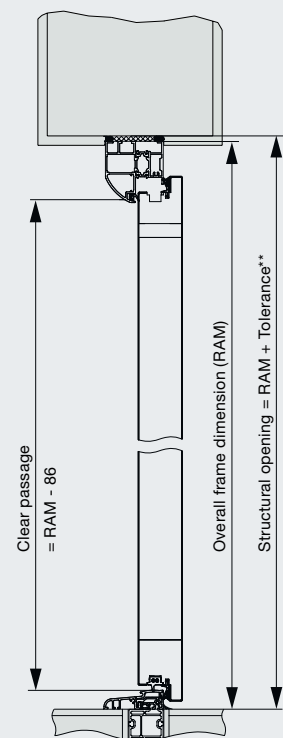

#### Horizontal view of side element

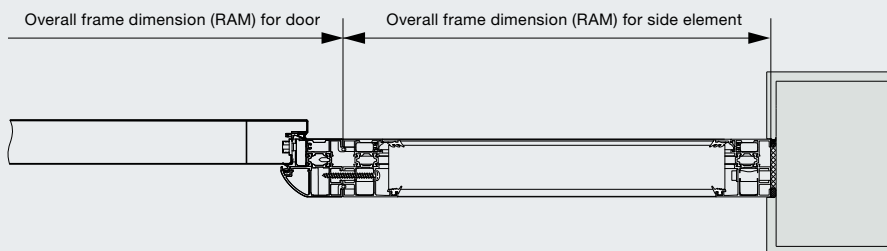

\* The clear passage width does not allow for the handle projection on the width.

\*\* The structural opening height is based on the finished floor dimension which includes any and all floor coverings. (Please note that each application/project is unique and the tolerance may alter)  
These doors are rebated on all four sides, failure to take the floor covering into consideration could prevent the door from opening.

# Experience real Hörmann quality

For every application involving new construction and modernisation

## Garage doors

Perfectly match your personal architectural style: up-and-over or sectional doors made of steel, timber or GRP.

## Door operators

Enjoy extra convenience and security: Hörmann operators for garage doors and entrance gates.

## Entrance doors

You can find just the right door in our comprehensive aluminium entrance door ranges, with a model to fit almost every need and requirement.

## Steel doors

Sturdy doors for your whole home, from basement to roof.

## Frames

Choose from our comprehensive range of products for new construction, expansion, and modernisation.



[www.hormann.co.uk](http://www.hormann.co.uk)

All rights reserved. No part may be reproduced without our prior permission. Subject to changes.

# Hörmann: Quality without Compromise



Hörmann KG Amshausen, Germany



Hörmann KG Antriebstechnik, Germany



Hörmann KG Brandis, Germany



Hörmann KG Brockhagen, Germany



Hörmann KG Dissen, Germany



Hörmann KG Eckelhausen, Germany



Hörmann KG Freisen, Germany



Hörmann KG Ichtershausen, Germany



Hörmann KG Werne, Germany



Hörmann Genk NV, Belgium



Hörmann Alkmaar B.V., Netherlands



Hörmann Legnica Sp. z o.o., Poland



Hörmann Beijing, China



Hörmann Tianjin, China



Hörmann LLC, Montgomery IL, USA



Hörmann Flexon, Leetsdale PA, USA

Hörmann is the only manufacturer worldwide that offers you a complete range of all major building products from one source. We manufacture in highly-specialized factories using the latest production technologies. The close-meshed network of sales and service companies throughout Europe, and activities in the USA and China, make Hörmann your strong partner for first-class building products, offering „Quality without Compromise“.

**GARAGE DOORS**

**OPERATORS**

**INDUSTRIAL DOORS**

**LOADING EQUIPMENT**

**HINGED DOORS**

**DOOR FRAMES**

**Hörmann (UK) Ltd**, Gee Road, Coalville, Leicestershire LE67 4JW  
Phone (01530) 513000, Fax (01530) 513001

